

Take control with Tank Gauging Automation!



Tank Gauging Automation Systems



Fuel
Automation
Innovative Solutions



Rosami Court, No. 4
Muringa Road.
P. O. Box 52937 - 00200.
Nairobi, KENYA.

**FUEL
SAVE**
TECHNOLOGIES

tel : (+254) 20 386 5565
cell : (+254) 722 511 072
(+254) 722 260 027
email : info@fuelsave.co.ke
website : www.fuelsave.co.ke

www.fuelsave.co.ke

www.fuelsave.co.ke



AUTHORISED AGENT

Petech Tank Gauging Automation Systems

Petech Wireless Tank Gauging Automation

The flexible station automation structure of Petech Automation Systems can offer both wired and wireless communication option between the tank site and the automation PC. State of art Asis wireless technology uses secured RF frequency to establish communication between the tank site and the computer. Eliminates the cost and need of concrete cutting, digging, piping and reconstructing to the minimum level in the station where there is no infrastructure for cabling and where the tank Sites located far from the control room of the station. Petech Wireless Tank Gauging Automation means;

- Better project cost optimization
- Faster installation
- Less civil work
- Less maintenance
- More flexibility for integration with new technologies
- Less installation and labor work cost
- Mobile Investment (Can be transferred to another station at any time)




Petech Tank Gauging Automation

Measurement

It gives the heat, liter amount and mm height of the existing fuel oil. It gives the mm height of the existing and discharged water. It gives the fuel oil and water level in the tank visually. All the tanks in the area can be measured simultaneously.

Filling

It gives the mm height and liter amount of fuel oil discharged in the tank. When filling starts, it recognizes the operation automatically. It makes density calculations according to the heat change during filling. It manages the filling depending on levels and overflows. When the filing is completed, it prints filling receipt automatically or controlled.

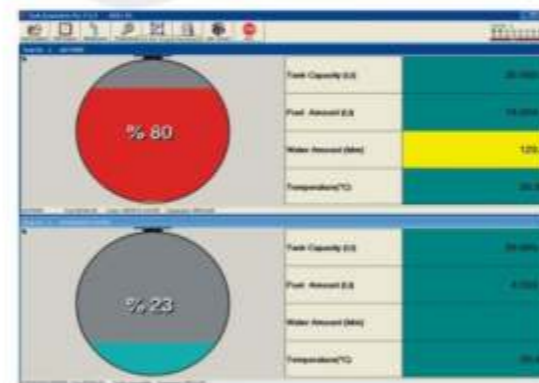

Leakage Detection

Except the fuel oil distribution pump, it gives the leakage alarm automatically in the event of fuel oil decreases. It continuously makes leakage control and recording for 24 hours. It may change the leakage control values according to the structure of tank wall.

Alarm

It gives alarm in cases of leakage, overflow during filling and fuel oil warning limits. It records all the warnings and alarms. When fuel oil in tank reaches to a critical level, it automatically sends the order information. When fuel oil in tank decreases to the level of fuel oil suction pipe, it gives the fuel oil finishing alarm.

Reporting

It gives instant and detailed report about all the parameters in the system. In gives information on tank stock, filling, consumption, inventory, sales, etc. It prepares the report in the report display of system or in Excel format.

Central Connection

All the system may be observed by the station management and center management for 24 hours by means of any computer connected to internet as web-online.

Automatic Calibration

The system operates integrally with pump automation. In systems with pump automation, it communicates with the pump selling to establish a calibration table and makes automatic calibration.

